

Seatbelt Solutions

www.seatbeltsolutions.com



3-Point Conversion Seatbelt Installation Guide for:

1973 - 1987 Chevy Trucks

Seatbelt Solutions

1973-1987 Chevrolet Truck Seat Belt Hardware Installation Kit Contents



90 Degree Bracket



1 1/2" x 7/16"x20 Bolts



2.5" Flat Washer



1" x 7/16"x20 Bolts



Washers



Bolt Caps



7/16" x 20 Nuts

The hardware included in this kit has been designed to work your specific vehicle. If your vehicle has existing anchor mounting points installed you may not need all of the provided hardware. You may reuse factory mounting bolts if you have them.


NOTE: This is an installation guide only, designed to aide you during the process of installing your new seat belts. Some installations may not be covered therefore it will be the installers responsibility to determine the safest mounting location.

Seatbelt Solutions, Inc, nor our vendors, bear any responsibility for improper installations by the end user or professional installer. We have designed this installation guide to be as informative and accurate as possible, however some modifications or fabrication may be required for some vehicles. If you have any questions or concerns we strongly suggest you contact a professional installation repair shop.


Seatbelt Solutions 2019

1973-87 CHEVY TRUCKS

1. Remove old seatbelts. Clean any debris and rust out of threaded holes with a wire brush or thread chaser. If necessary, remove the front seats making sure to set the mounting bolts aside.

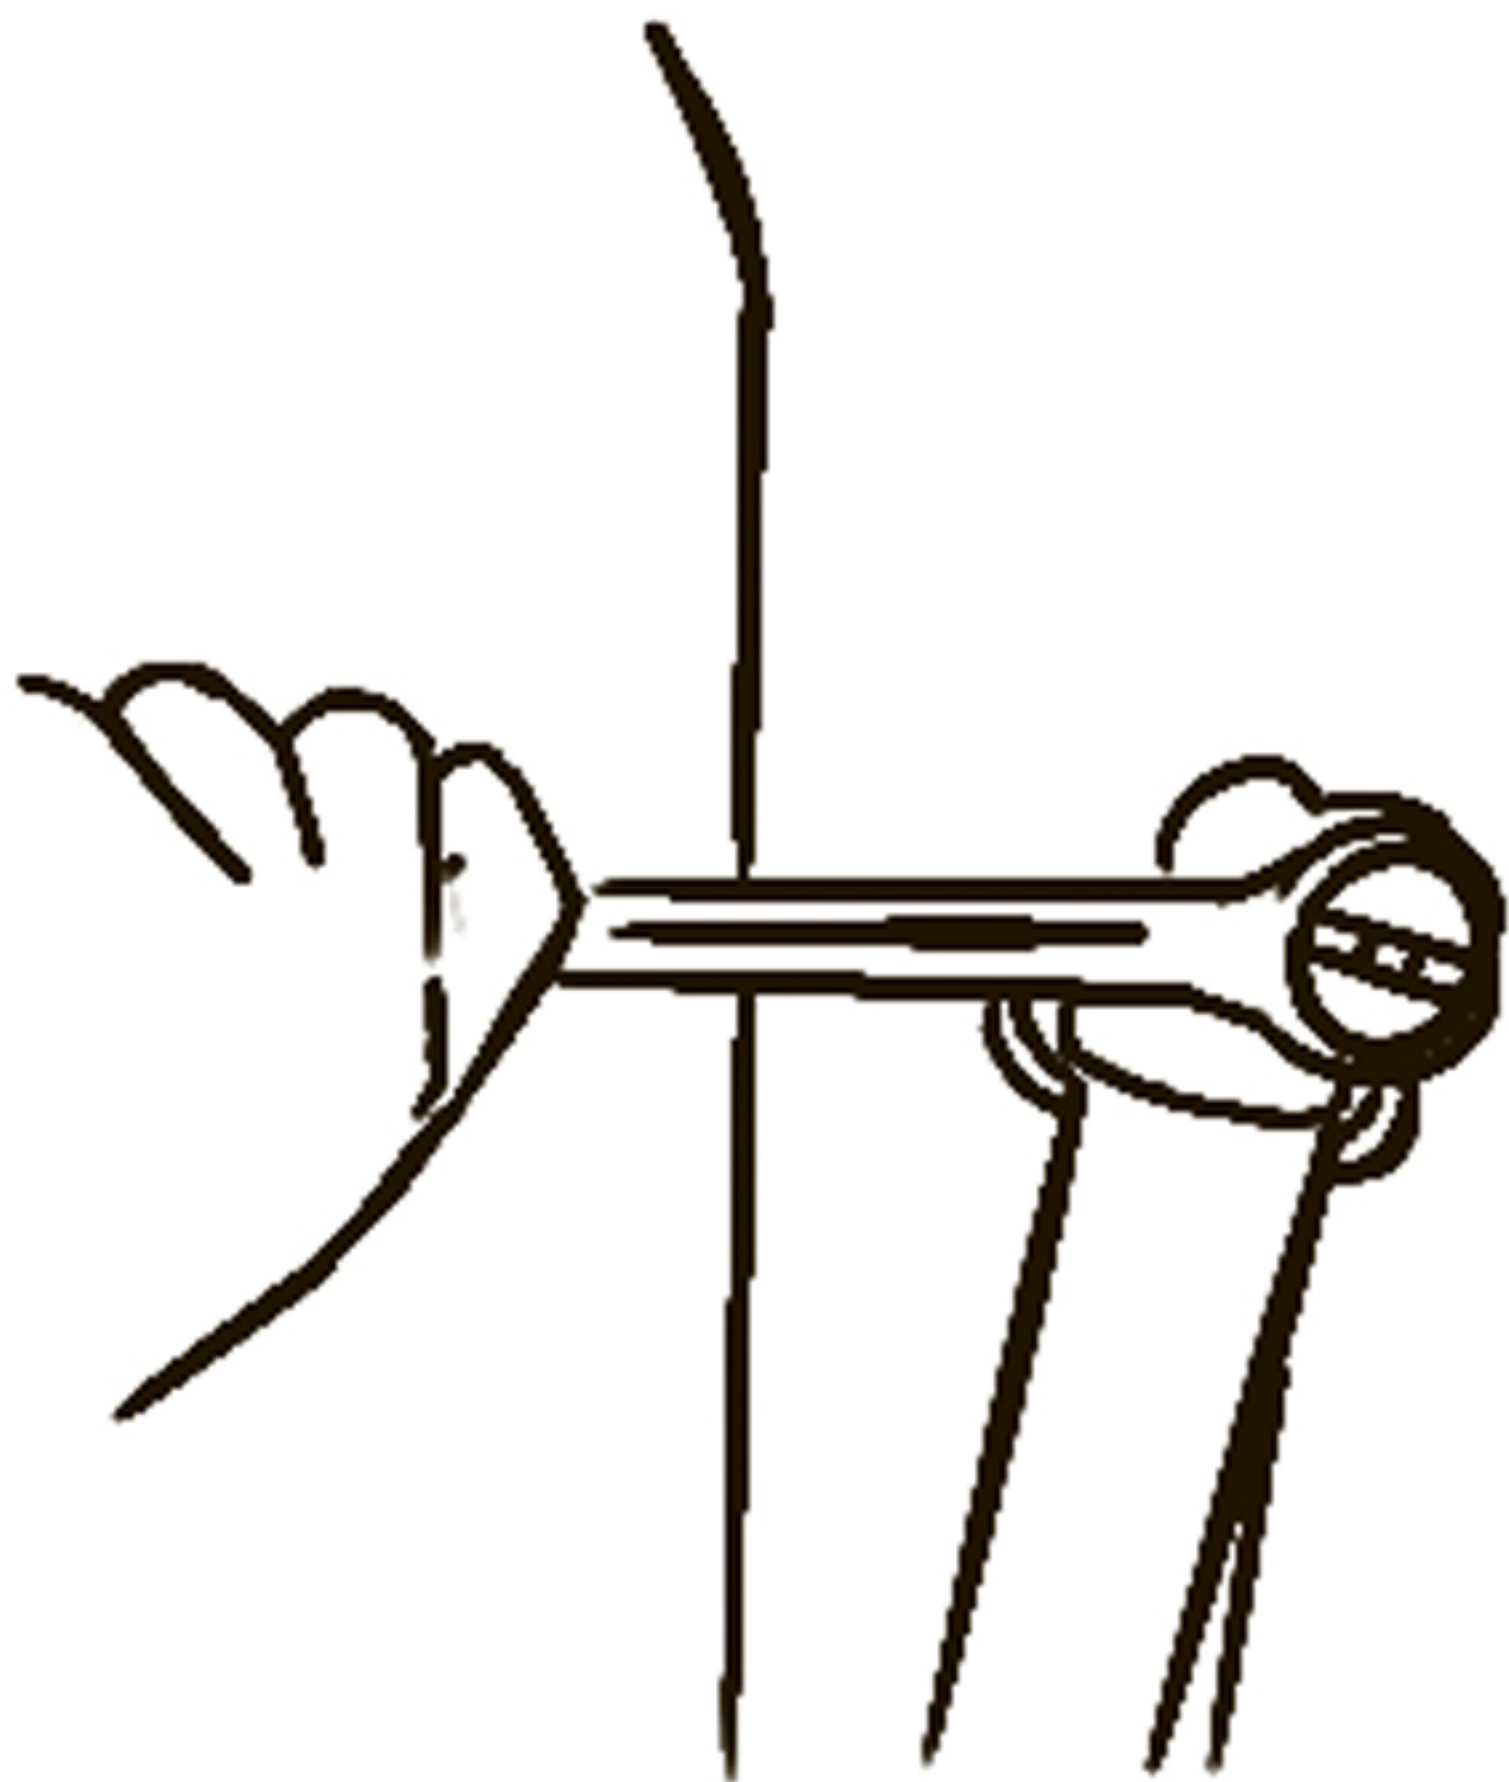

2. First remove the factory shoulder loop from your vehicle and install the new (door post fitting - DPF) that came with your new seat belts. You may reuse the factory shoulder bolt then install the plastic cover provided.

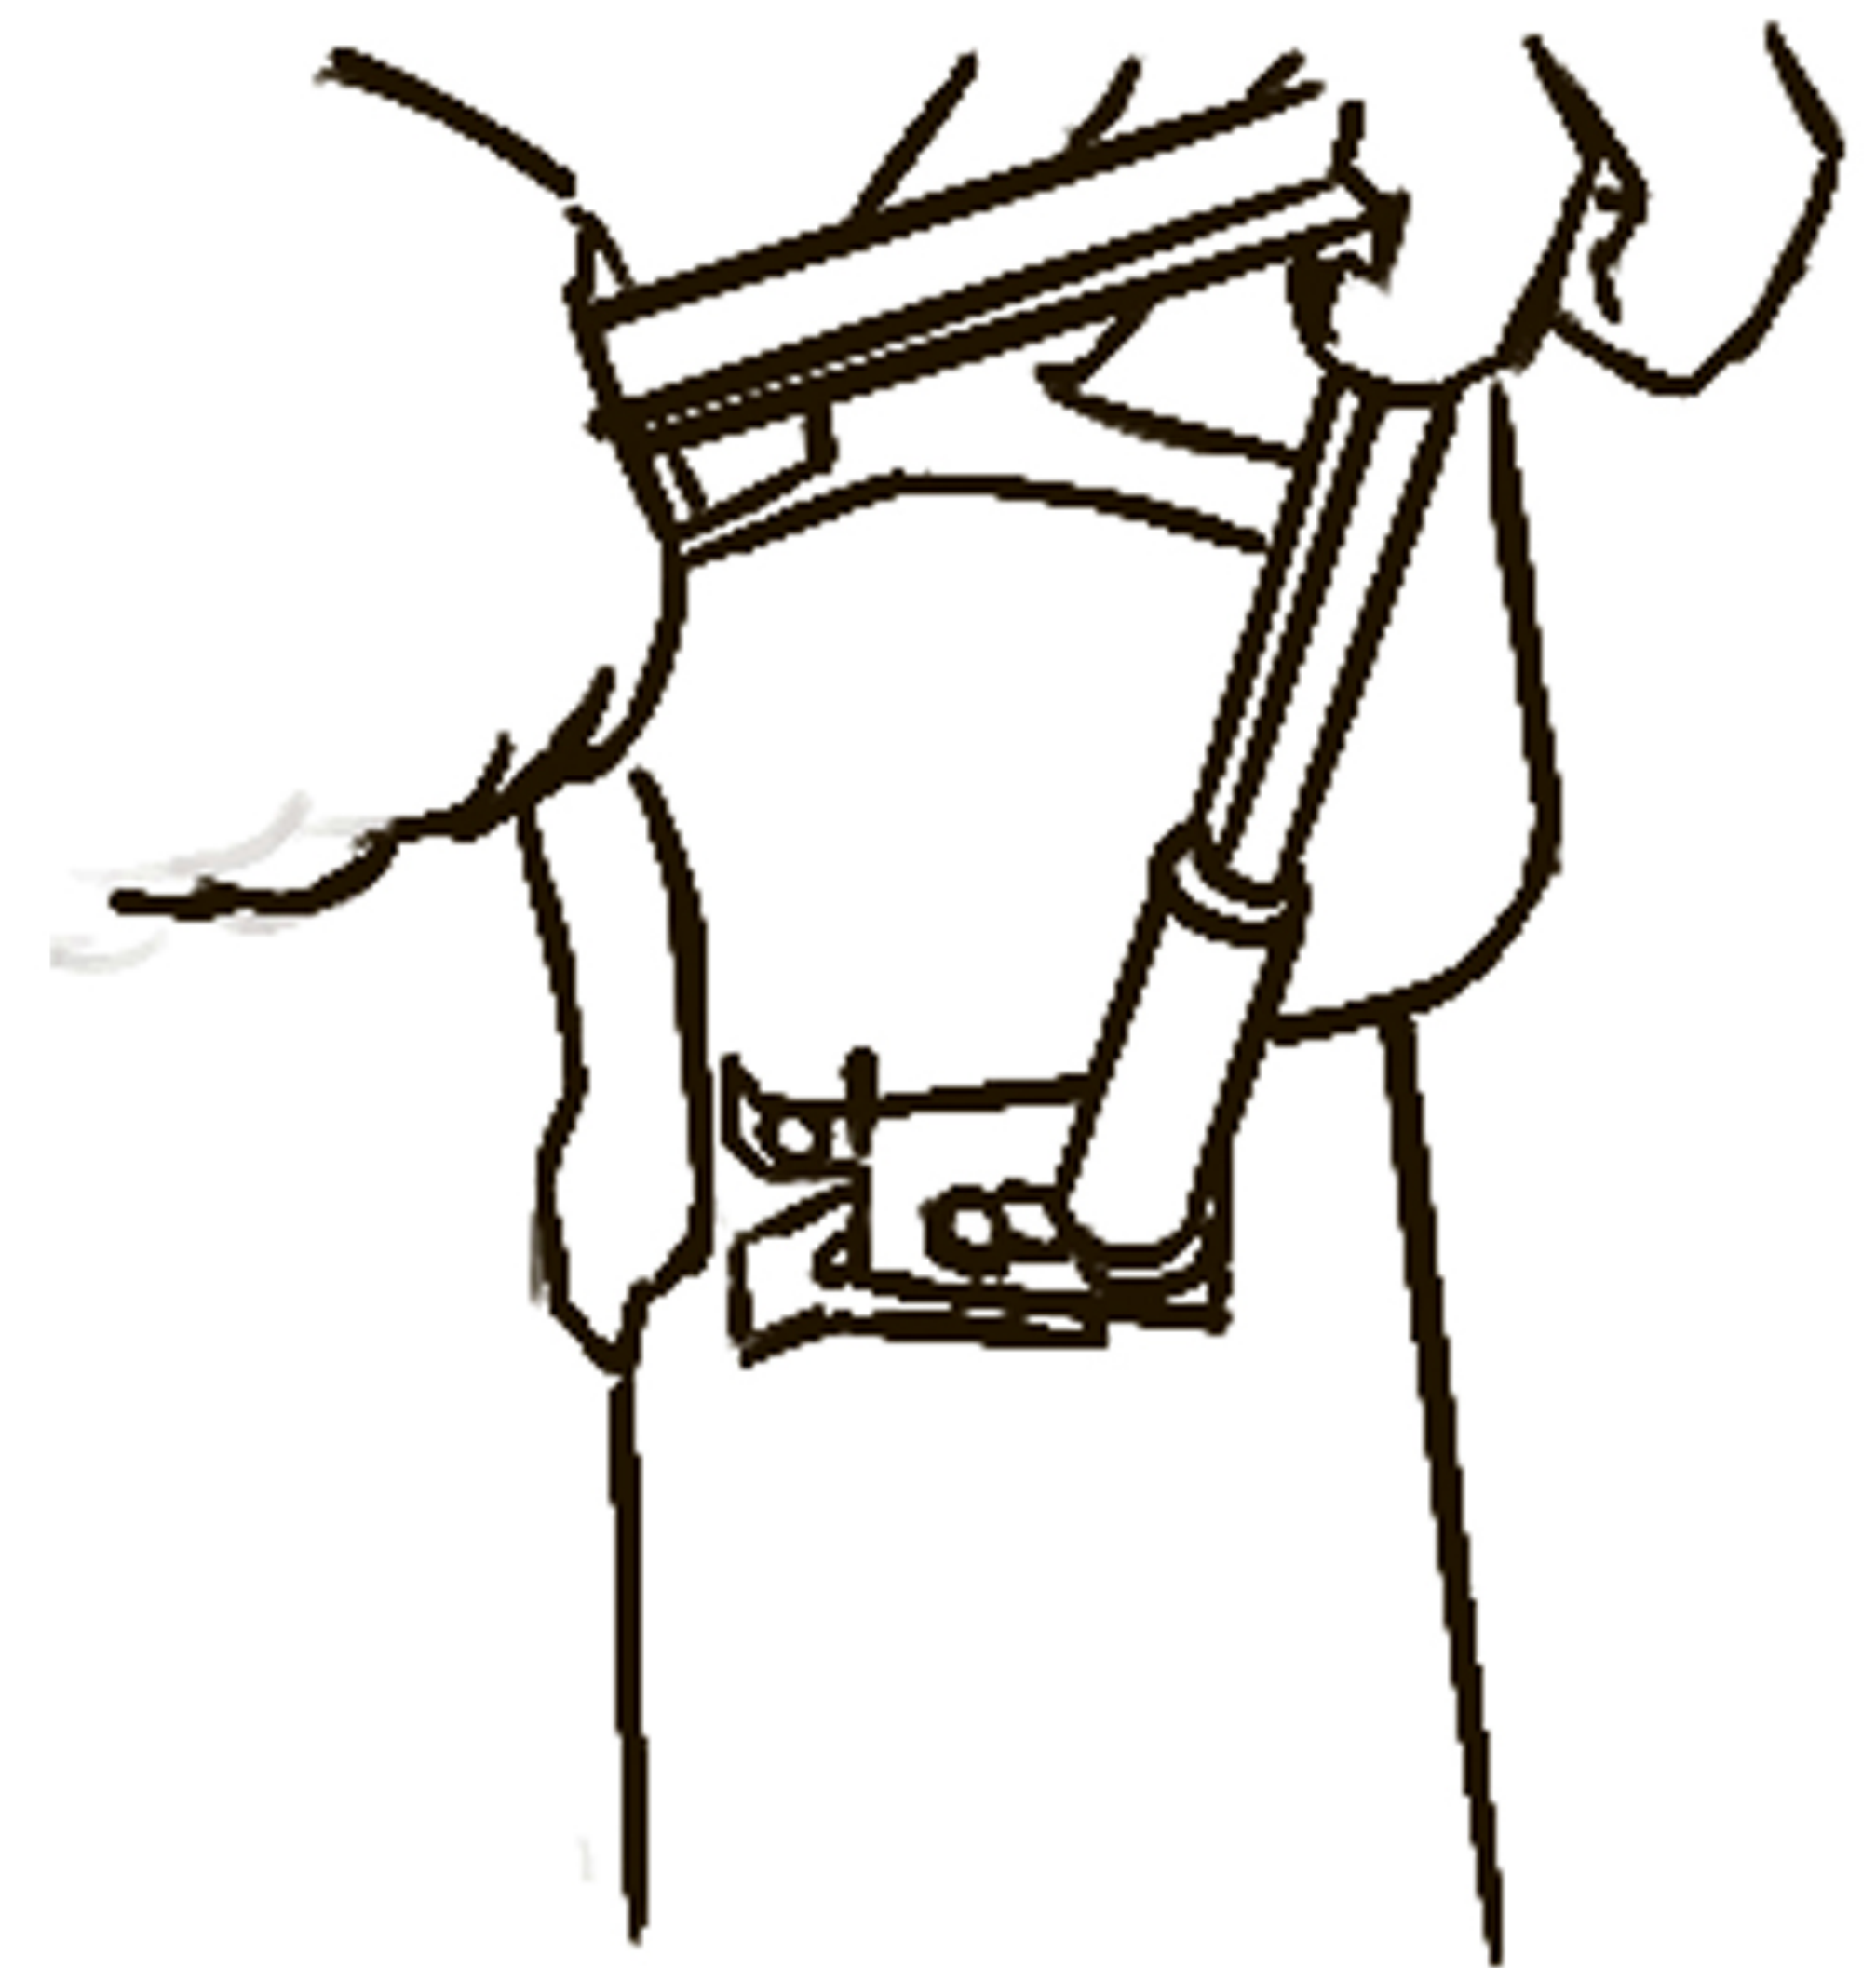


3. Next you can remove the dual retractor unit and bolt the 90 degree "L" bracket in the factory mounting hole. Then install the new retractor as shown below with the long anchor sharing the same bolt as the retractor. Retractor may vary in appearance.



Passenger
Side
Shown

4. Last you can install the new buckle ends in the factory mounting location. Use the 90 degree L bracket bucket seat with sleeves.

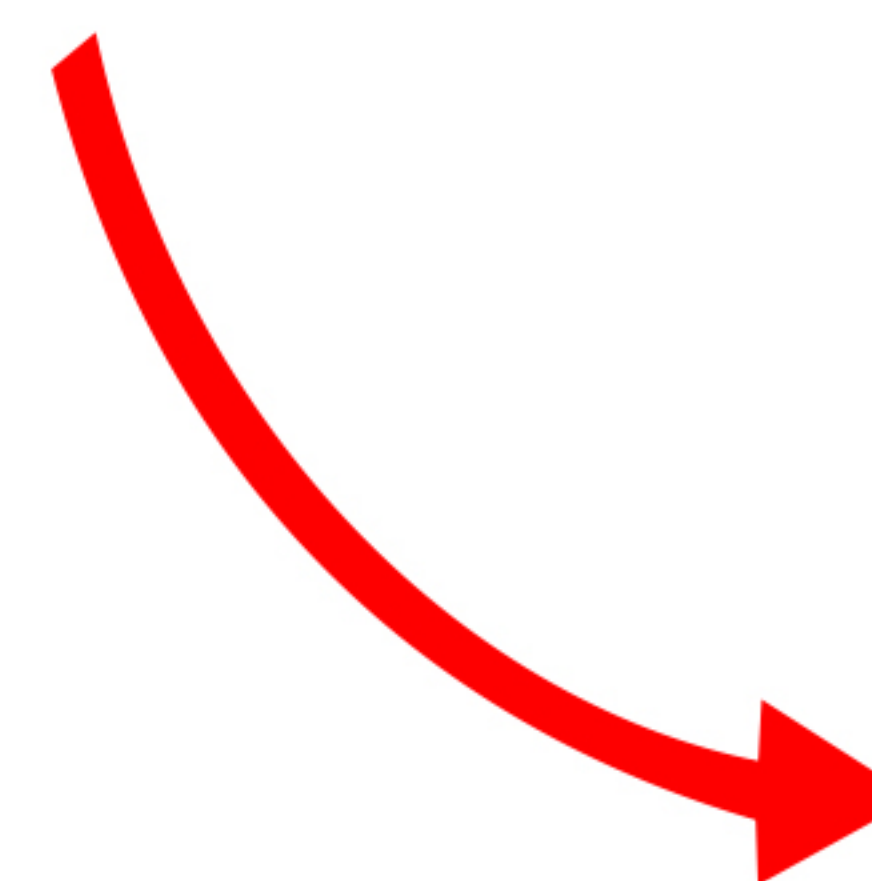

Warranty:

SEATBELT SOLUTIONS offers a one (1) year warranty on our products. The warranty covers defects in materials and workmanship. If, during the warranty period, the product fails under normal usage, because of a manufacturing defect, we will replace or repair the item after the unit has been returned to our facility for inspection and determination as to coverage.

Our warranty is limited to the retractor and buckle assembly only. The webbing material and associated hardware are *not covered* under our warranty.

To obtain repair or replacement under the terms of this warranty, please contact us via phone or e-mail and request a return authorization number. A copy of the original purchase receipt is required.

Our warranty expires if the seatbelt has been involved in an accident therefore the seat belt system cannot be warranted, repaired, or returned.

Illustrations by Alexandra Aragosta

Seatbelt Solutions, LLC
15835 Corporate Road N
Jupiter, FL. 33478
(561) 747-7165
Email: orders@seatbeltsolutions.com